


SERIES 5T

Momentary SPST



CHARACTERISTICS

- A key switch with several mechanical solutions, and color codes
- Positive tactile feel


PACKAGING

Type of Packaging: 500 pcs Bulk

SPECIFICATIONS

Initial Contact Resistance: 100 mΩ
Insulation Resistance: 100 MΩ
Dielectric Strength: 500 VAC
Travel: 0.8 mm max.
Life: ≥100.000 cycles
Operating Force: 130 gf ±50 gf
Soldering heat: 225°C for 3 secs.





HOW TO ORDER

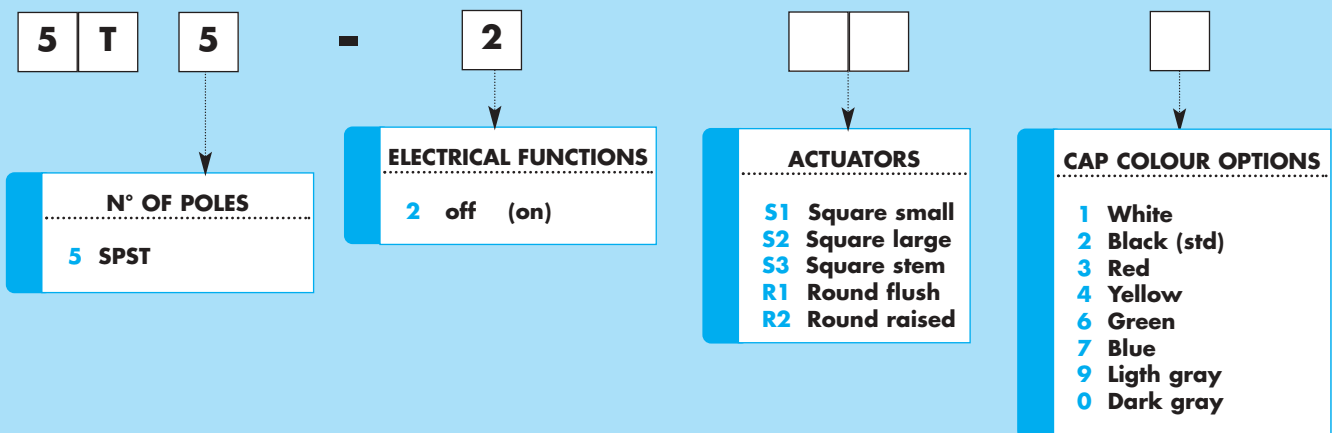

DIMENSIONS





Part N° shown: 5T52-S2x

P.C.B. mounting






Part N° shown: 5T52-S3x

P.C.B. mounting



Part N° shown: 5T52-R1x

P.C.B. mounting



Part N° shown: 5T52-R2x

P.C.B. mounting

