




**SERIES DH**

- Auto inserting type




**CHARACTERISTICS**

- Same size with IC, can be assembled by any automatic IC inserter
- Molded 0.3" integrated circuit packing outline allowing automatic insertion
- Smaller size makes better heat convection during PC board wave soldering
- Top tape sealed to withstand wave soldering, board washing
- UL94V-0 Materials
- Twin contact designed to ensure stable contact
- Gold plated contact

**SPECIFICATIONS**

**Rating:** Switching 25mA, 24 @VDC  
 Non Switching 100 mA@ 50 VDC  
**Contact Resistance:** 50 m Ω Max at initial  
 100 m Ω Max after life test  
**Insulation Resistance:** 1,000 M Ω @100 VDC  
**Dielectric Strength:** 500 VDC, 1 Min  
**Capacitance between adjacent switches:** 5pF Max  
**Temperature:** Operating -25°C to + 70°C  
 Storage -40°C to +85°C  
**Life:** 2,000 Operations  
**Humidity:** 95% RH @ 40°C for 96 Hours  
**Vibration:** per Mil - STD-202F, method 204D  
**Solderability:** After flux 230 ±5°C for 5 ±0.5 secs 95% coverage  
**Soldering Heat:** 260 ±5°C for 5 ±1 secs.

**HOW TO ORDER**


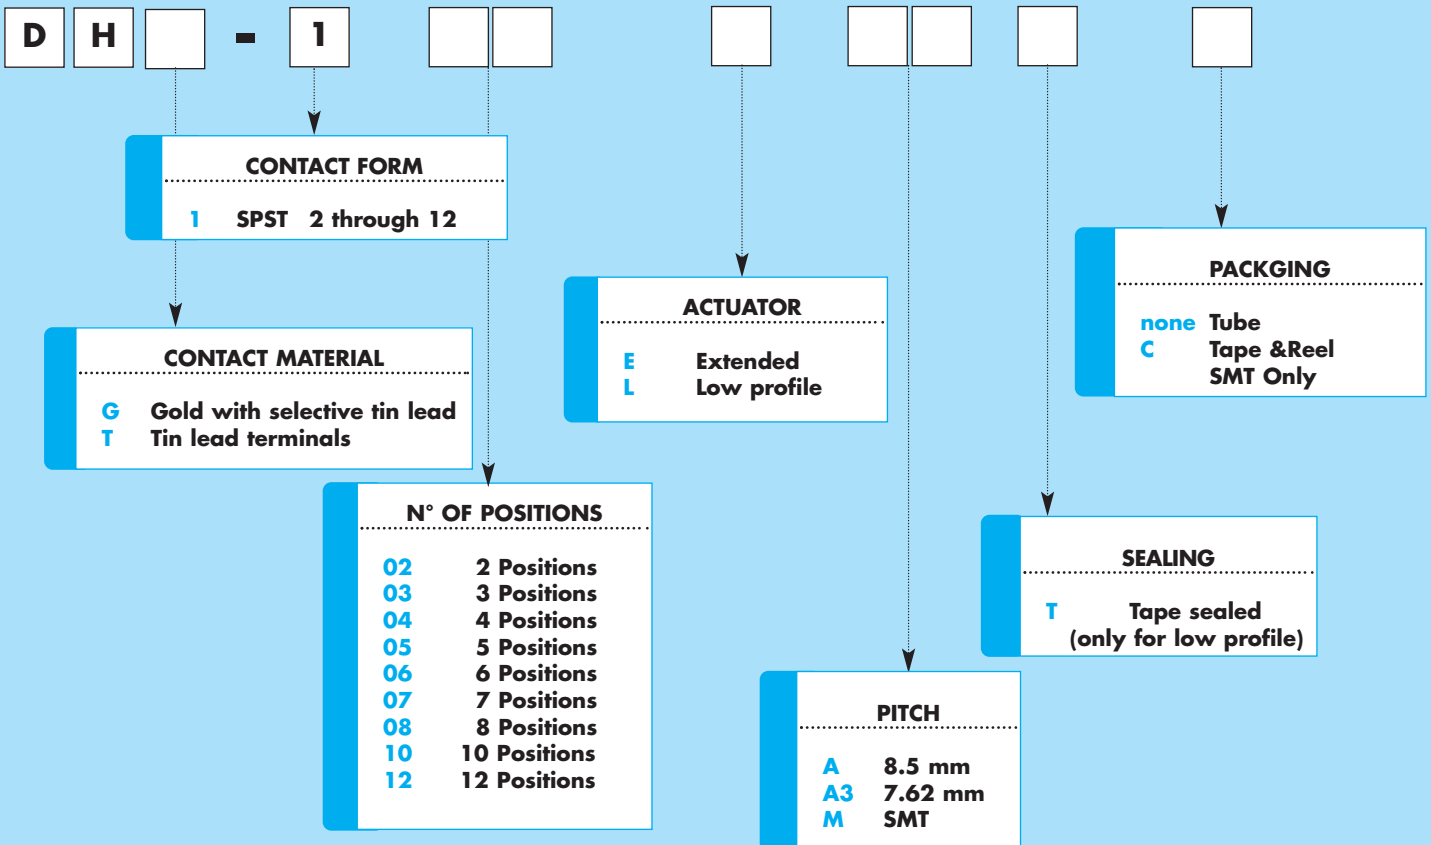


DIP SWITCHES




DH


MODEL AND DIMENSIONS



P.C.B. LAYOUT (Top view)




A Through hole



L Low profile Actuator


Part N° shown: DHT-108LAT







E Extended Actuator

Position	2	3	4	5	6	7	8	10	12
A Dim	6.88	9.42	11.96	14.5	17.04	19.58	22.12	27.20	32.28


P.C.B. LAYOUT (Top view)



M Surface Mount



L Low profile Actuator  
Part N° shown: DHT-108LMT



E Extended Actuator

PACKAGING

Tape & Reel: 200 pcs for reel

