




SERIES DP

- Piano type, epoxy sealed, DIP series with several contact forms




CHARACTERISTICS

- Edge actuated (Piano Type)
- Excellent tactile feel
- UL94V-0 Materials
- Epoxy seal on the terminal side
- Double action wiping contacts

SPECIFICATIONS

Rating: Switching 25mA, 24 @VDC
 Non Switching 100 mA@ 50 VDC
Contact Resistance: 50 m Ω initial
 100 m Ω after life test
Insulation Resistance: 1,000 M Ω @100VDC
Dielectric Strength: 500 VDC, 1 Min
Temperature: Operating -25°C to + 70°C
 Storage -40°C to +85°C
Life: 2,000 Operations
Operating Force: 800 Gr Max
Humidity: 95% RH @ 40°C for 96 Hours
Vibration: per Mil - STD-202F, method 204D
Solderability: After flux 230 ±5°C for 5 ±0.5 secs 95% coverage
Soldering Heat: 260 ±5°C for 5 ±1 secs.



HOW TO ORDER

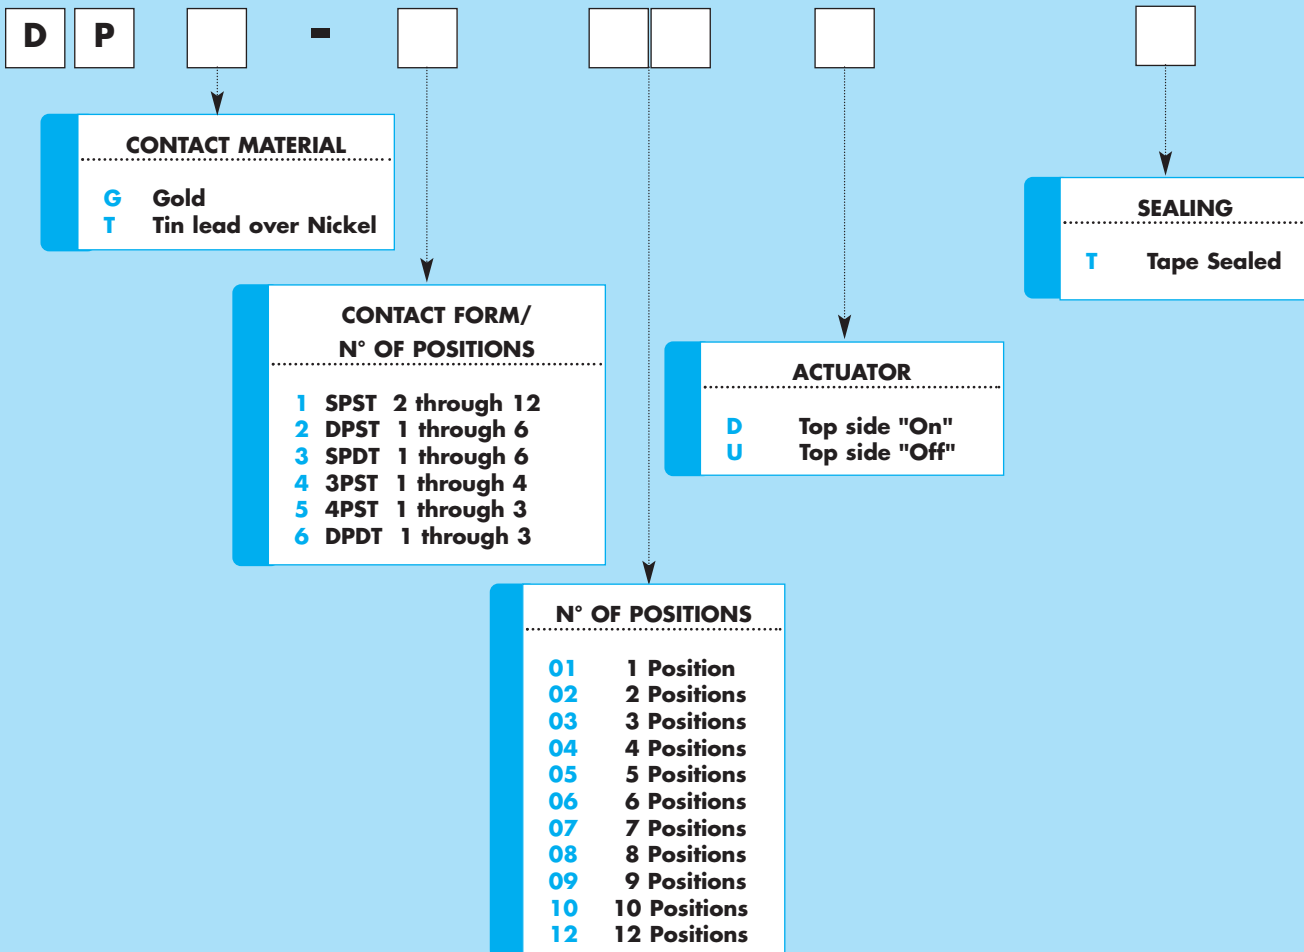

SERIES DP




CONTACT FORM - DIMENSIONS

1 SPST





Position	2	3	4	5	6	7	8	9	10	12
A Dim	6.7	9.2	11.7	14.2	16.7	19.2	21.7	24.2	26.7	31.8

P.C. LAYOUT






Part N° shown: DPT1 - XXD

2 DPST





Position	1	2	3	4	5	6
A Dim	6.7	11.7	16.7	21.7	26.7	31.8

P.C. LAYOUT






Part N° shown: DPT2 - XXD

3 SPDT



Position	1	2	3	4	5	6
A Dim	6.7	11.7	16.7	21.7	26.7	31.8

P.C. LAYOUT




Part N° shown: DPT3 - XXD



SERIES DP


CONTACT FORM - DIMENSIONS

4 3PST

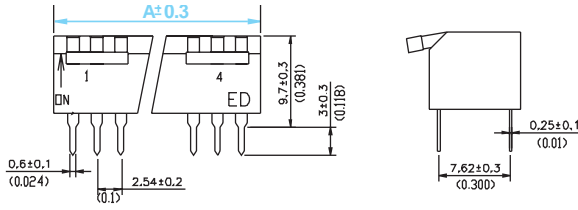


Position	1	2	3	4
A Dim	9.2	16.7	24.2	31.8

P.C. LAYOUT

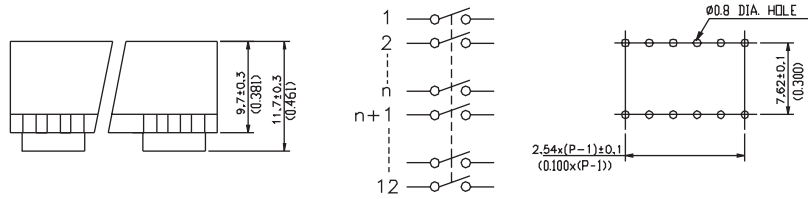


Part N° shown: DPT4 - XXD

5 4PST

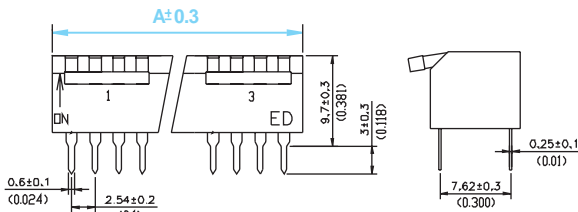


Position	1	2	3
A Dim	11.7	21.7	31.8

P.C. LAYOUT

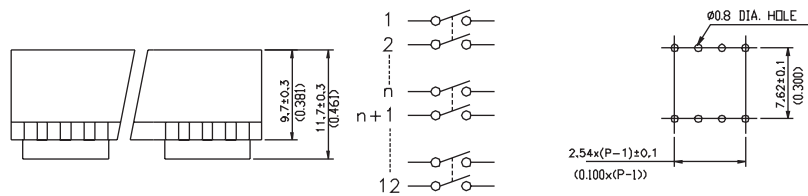


Part N° shown: DPT5 - XXD

6 DPDT

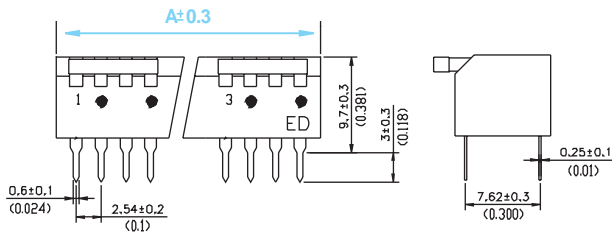

Position	1	2	3
A Dim	11.7	21.7	31.8

P.C. LAYOUT

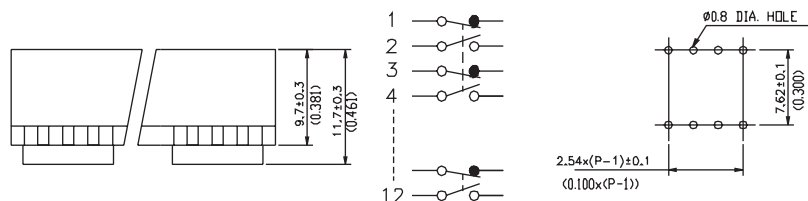

Part N° shown: DPT6 - XXD