


SERIES KL09-AL

- Different Withdrawable Access Keys



CHARACTERISTICS

- 4 Disk Tumbler cylinder, Single bitted Keys
- Different Access Keys
- Single pole or Double pole Switching


SPECIFICATIONS

- Contact Rating:** 4A @ 125 VAC or 28 VDC - 2A @ 250 VAC
- Contact Resistance:** <math>< 10 \text{ m } \Omega</math>
- Insulation Resistance:** $10^6 \Omega$ min.
- Dielectric Strength:** 1000 V RMS Min @ sea level
- Electric Life:** 6.000 make & break cycles @ full load


MATERIALS

- Lock Housing:** Zinc alloy Die-casted & Nickel plated
- Cylinder:** 7 Pin in Zinc alloy Die-casted & Nickel plated
- Keys:** Brass or Brass Nickel-plated
- Contacts:** Hard Copper alloy Silver plated
- Mounting Nut:** Zinc alloy Die-casted & Nickel plated

HOW TO ORDER

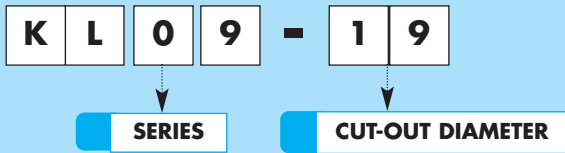

AUTHORITY KEYS

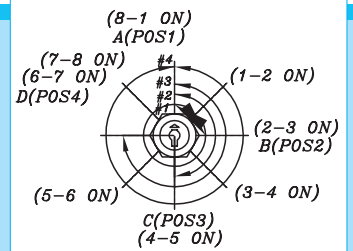

4 AUTHORITY LEVEL

- Key 1** Opens position A & B
- Key 2** Opens position A, B & C
- Key 3** Opens Position A, B, C & D
- Key 4** Opens Position A, B, C, D & A

This function allows up to 4 different key to have different access functions and can be drawn out of the cylinder

KEY-LOCK SWITCHES

