




## SERIES KM30

- Change-over Switch
- 5 Disk Tumbler Cylinder



## CHARACTERISTICS

- 90° Key-turn
- Optional Dust Cover
- M16 Screw


## SPECIFICATIONS

**Contact Rating:** 4A @ 125 VAC or 28 VDC - 2A @ 250 VAC  
**Contact Resistance:** <math>< 10 \text{ m}\Omega</math>  
**Insulation Resistance:** 10°  $\Omega$  min.  
**Dielectric Strength:** 1000 V RMS Min @ sea level  
**Electric Life:** 6.000 make & break cycles @ full load

## MATERIALS

**Lock Housing:** Zinc alloy Die-casted & Nickel plated  
**Cylinder:** 5 Disk tumbler in Zinc alloy Die-casted & Nickel plated  
**Keys:** Brass or Brass Nickel-plated  
**Contacts:** Hard Copper alloy Silver plated  
**Mounting Nut:** Zinc alloy Die-casted & Nickel plated

## HOW TO ORDER

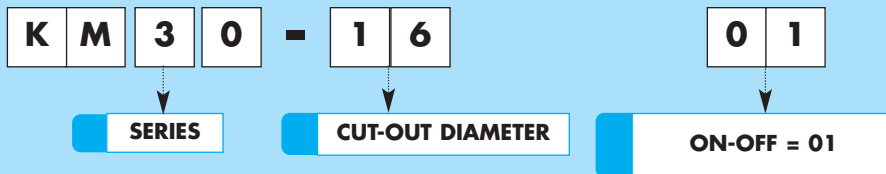

(\*) Same Key supplied standard

