

SERIES PC



CHARACTERISTICS

- Miniature DIL Pushbutton
- Side Actuated
- Dual LED
- Add-on front Cap
- 2.5 mm Travel

SPECIFICATIONS

Rating: 200 mA max @ 36VDC
Contact Resistance: 40 mΩ max initial
Insulation Resistance: 100 MΩ min @ 500V
Temperature: Operating -10°C to +60°C
Operating Life: 10.000 operations
Operating Force: 300±100Gf

HOW TO ORDER



ELECTRICAL FUNCTION

52 DPST off -(on)


CAP TYPE

- A** Bare Transparent Stem
- S** See-through Cap



LED COLOR

LED TYPE	ONE COLOR	TWO COLOR
R-RED	R	(RG) (GY)
G-GREEN	G	(RY) (GB)
Y-YELLOW	Y	(RB) (YB)
B-BLUE	B	


DIMENSIONS

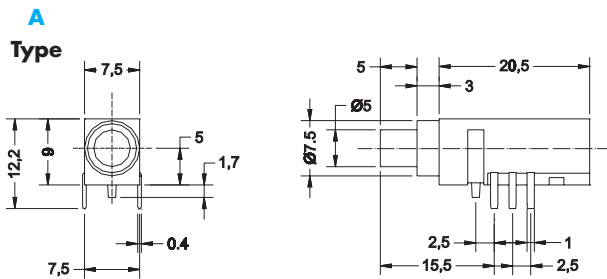

Part N° shown: PCA-x
(define x)

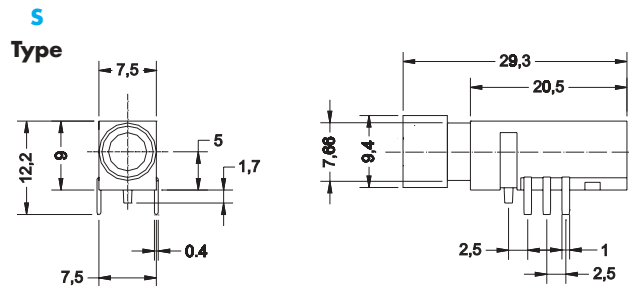

Part N° shown: PCS-xK
(define x)



P.C.B. layout

